



## USB POWERED 7" MONITOR

**XENARC**  
TECHNOLOGIES



- 5-Wire Resistive Touchscreen
- Connect up to six USB Monitors simultaneously
- Computer display all powered through a single USB cable
- Chip Monolithic Ceramic Capacitors for improved durability
- High Performance Image and Video Signal Processor
- 16x9 Widescreen aspect ratio
- Brightness - 350 cd/m<sup>2</sup>
- Vertical and Horizontal image flip
- LED backlight with Automatic and Manual backlight level adjustment
- Built-in scaler supporting resolutions up to 1920 x 1080





Physical Resolution: 800x480

Supported Resolution: 640 x 480 - 1920 x 1080

Brightness: 350 cd/m<sup>2</sup>

Contrast Ratio: 400:1

Viewing Angle: 140° Horizontal, 120° Vertical

Response Time (Tr/Tf): 10/15ms (Typ.)

Operating Voltage: DC 9V ~ 18V

Power Consumption: <10W


Operating Temperature: -4 °F ~ 158°F

Storage Temp: -22°F ~ 176°F

Weight (lb): 1.257

24 Month Warranty

All measurements are in [ mm ]

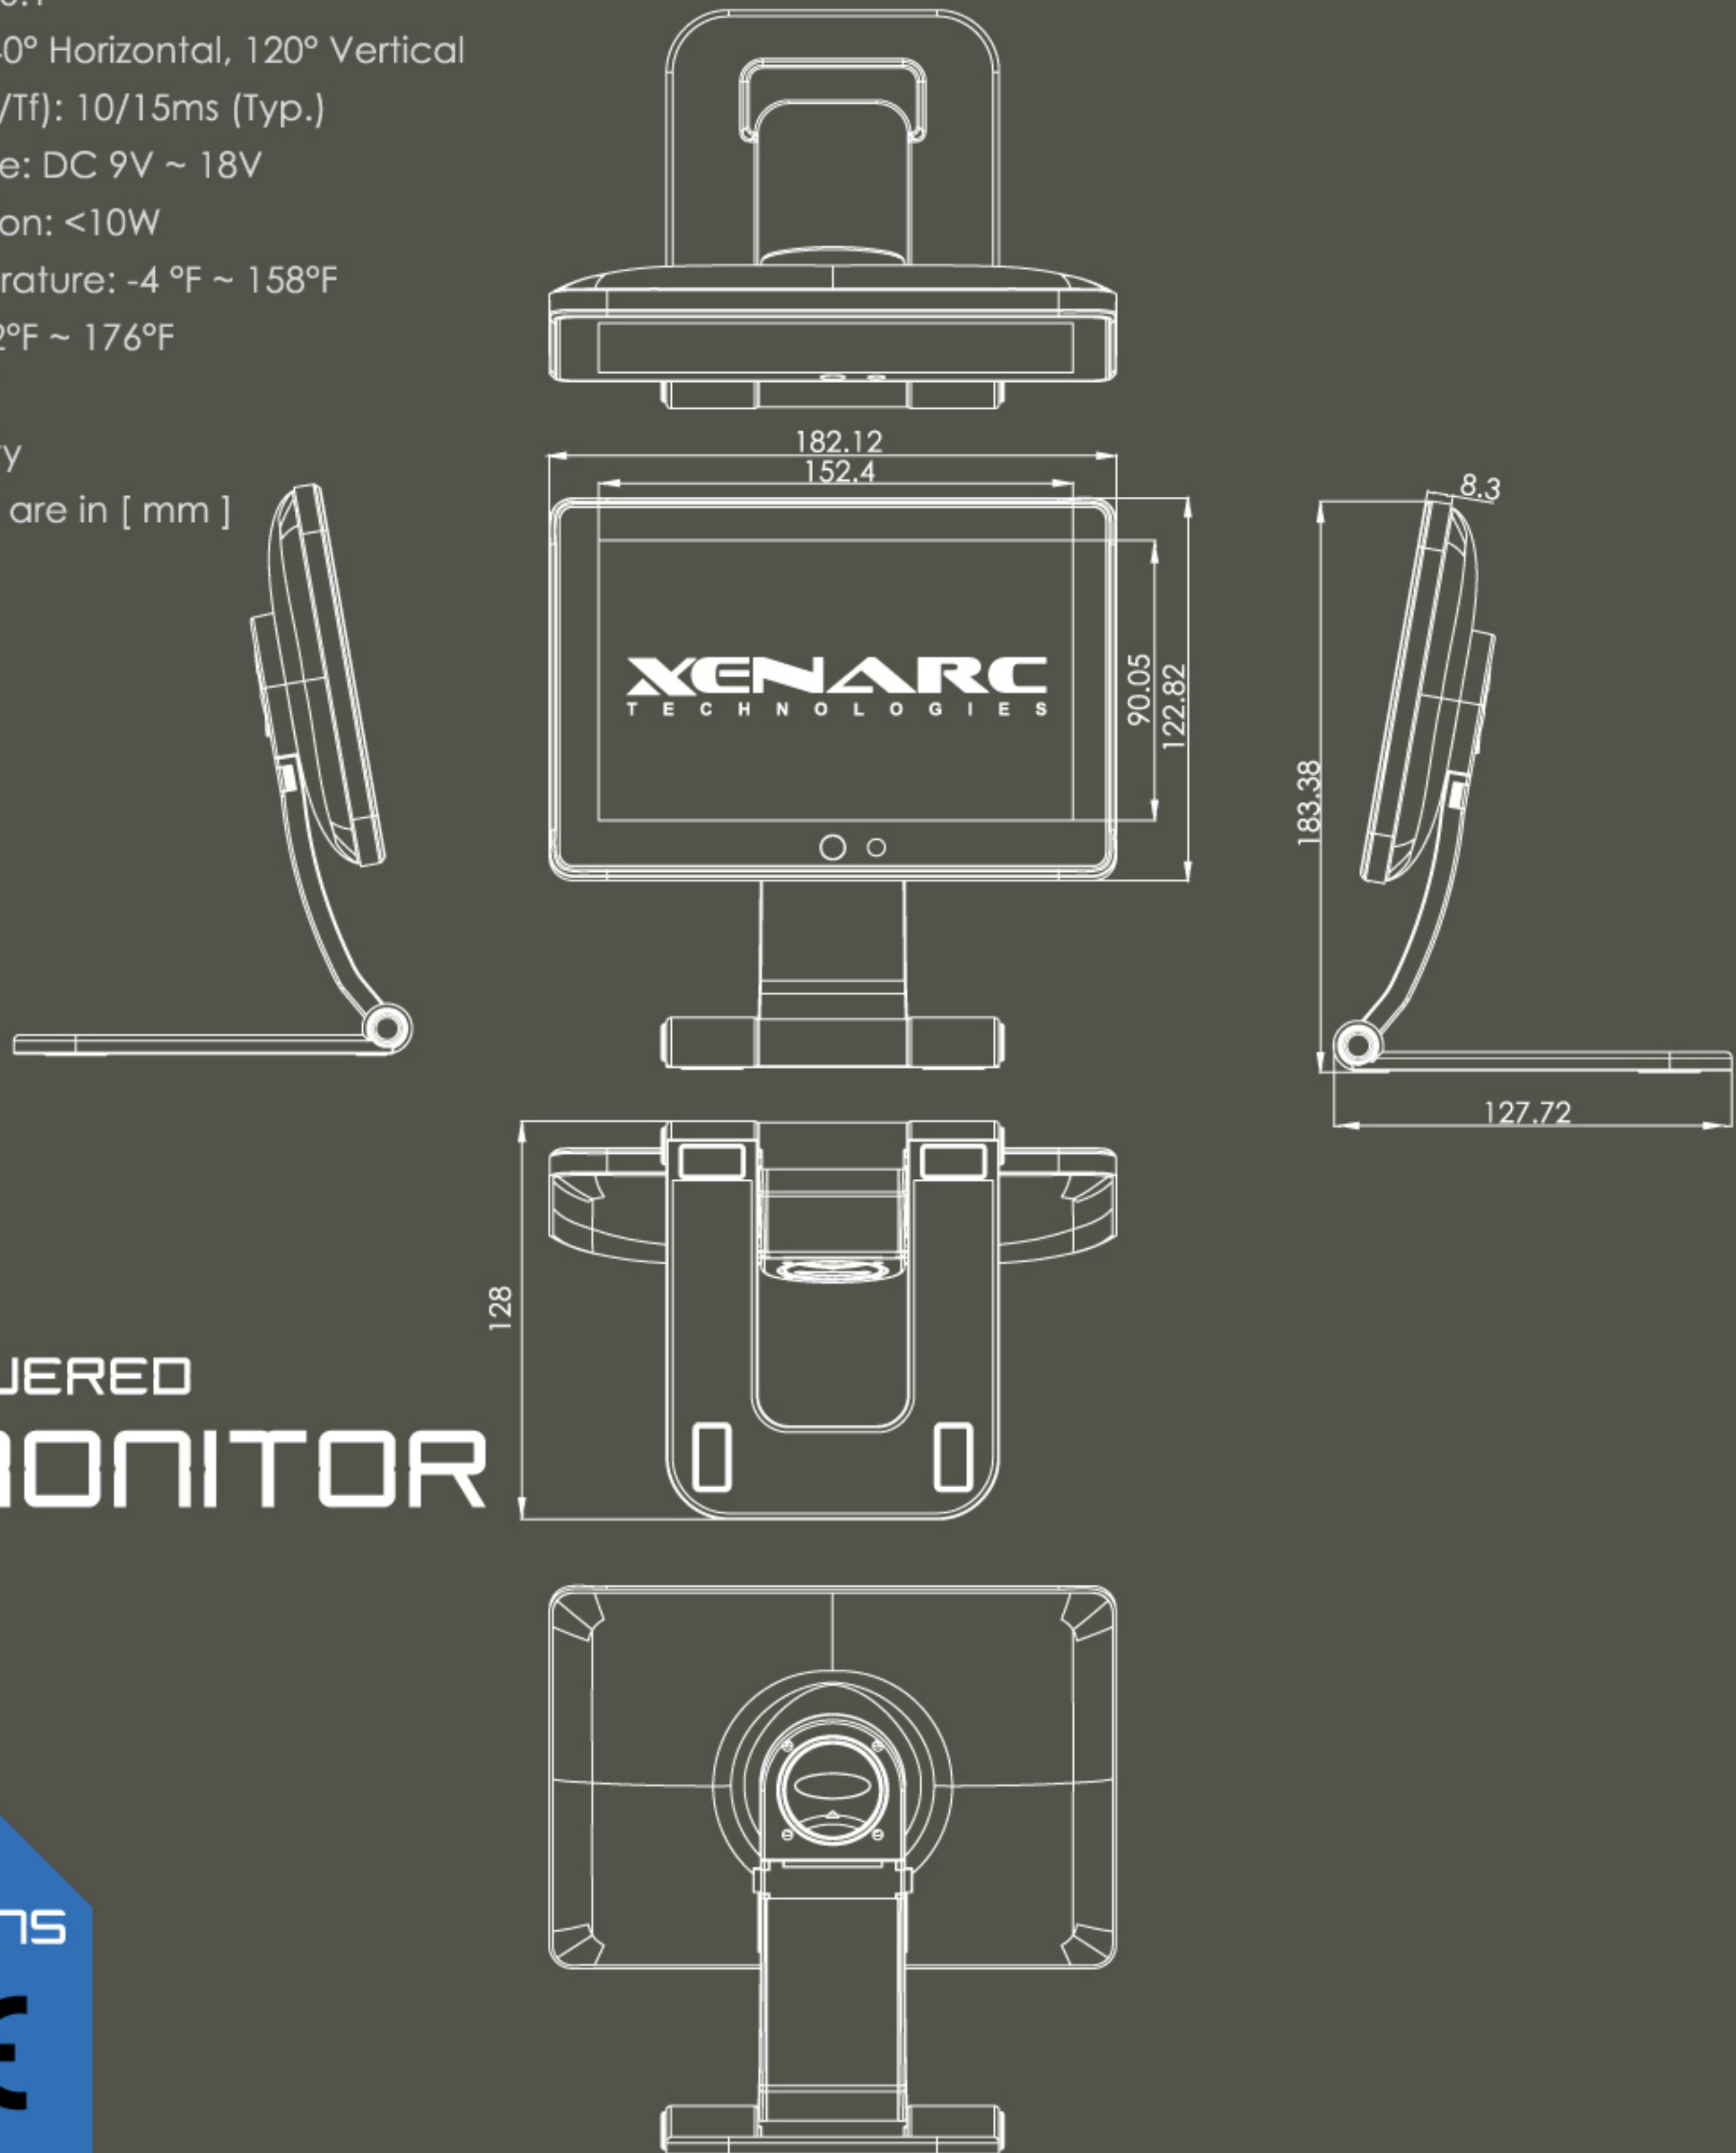

USB POWERED

# 7" MONITOR

## CERTIFICATIONS



**RoHS**



TEL: 949.380.8898 FAX: 949.380.0888

EMAIL: SALES@XENARC.COM