




Cutout dimension is 8.02"(203.9mm) by 4.95"(125.9mm). Thickness of panel cannot exceed 3mm.

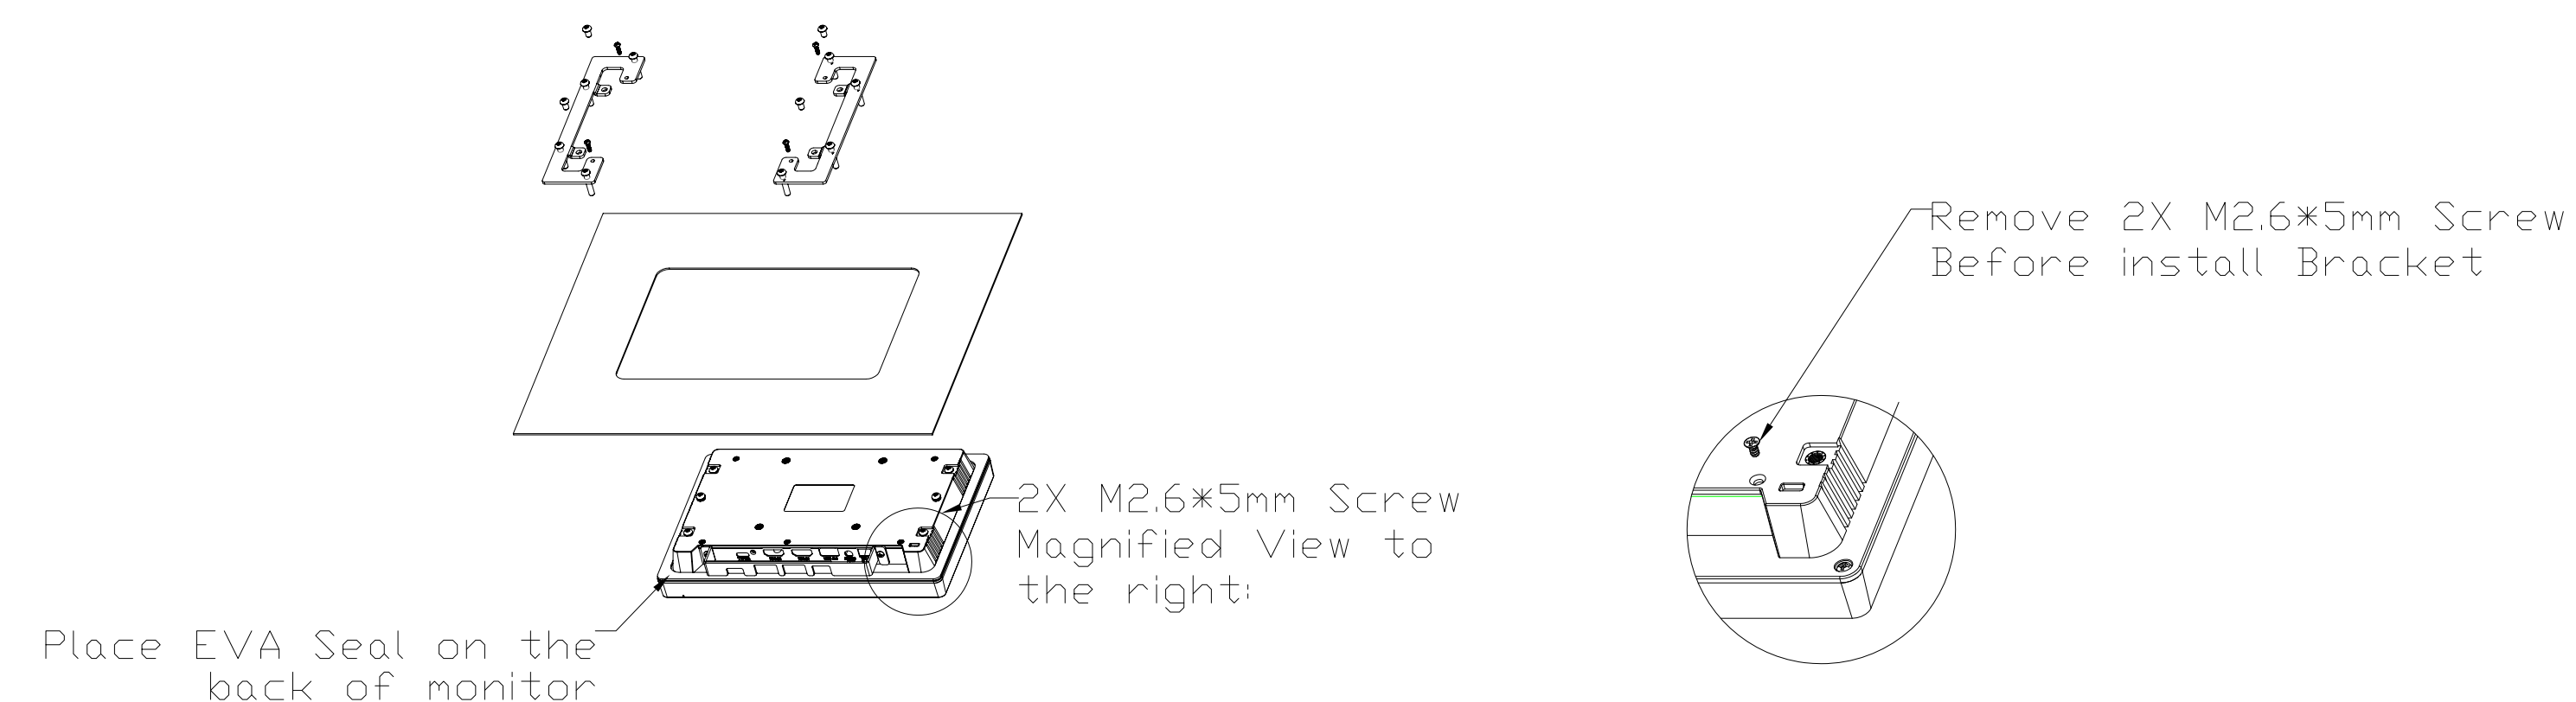


Step 1: Create panel cut out, remove two M2.6x5mm screw and place EVA seal

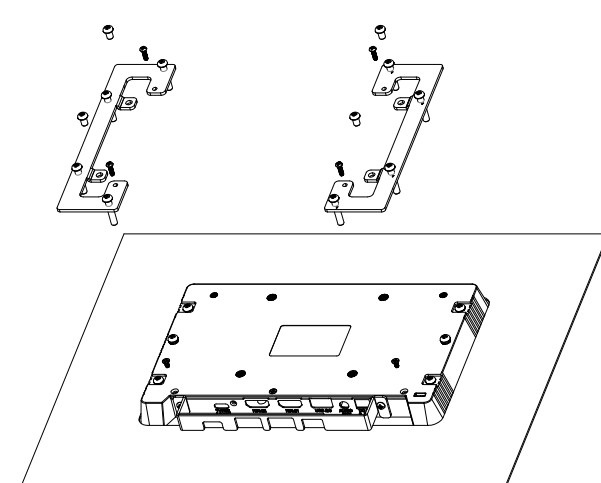

Step 2: Place the monitor into the panel cutout

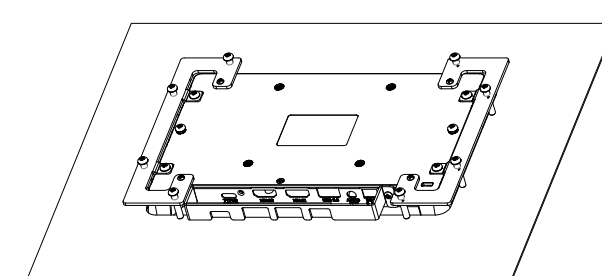

Step 3: Install the two brackets.

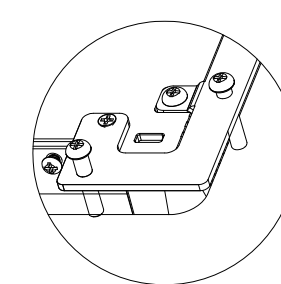

Step 4: Tighten the M4x8mm & M2.6x8mm screws to secure the bracket and tighten the longer M4x20mm screws to secure the monitor againstst the panel.

